

GreenStuf®

BUILDING INSULATION BLANKET

GreenStuf® Building Insulation Blanket (BIB) is 100% polyester thermal insulation blanket. GreenStuf BIB is a non-irritant thermally efficient insulation designed for insulating commercial and industrial roofs. GreenStuf BIB is supplied as lofted green-tinted insulation blanket for commercial roofing applications.

APPLICATIONS

GreenStuf BIB is designed for the thermal and acoustic insulation of commercial and industrial buildings and will assist in meeting the requirements of the New Zealand Building Code (NZBC) H1 Energy Efficiency.

To ensure Building Code compliance, architects and building designers are advised to consult an engineer or the relevant NZ Standards before specifying thermal and acoustic insulation products. For information and assistance please contact your Autex account manager.

TECHNICAL

NZBC Compliance: When installed in accordance with the manufacturer's instructions, GreenStuf will satisfy the 50 year durability clause NZBC B2.3.1 (a). GreenStuf meets the relevant clauses of NZBC E3 Internal Moisture, F2 Hazardous Building Materials, and will contribute to meeting H1 Energy Efficiency.

Acoustic Performance: GreenStuf insulation will assist in reducing airborne sound (including rain drum) by absorbing reverberant noise. Actual performance will vary depending on design, materials and installation. For further information on acoustic design please contact your Autex account manager.

Fire Regulations: GreenStuf insulation may not be suitable for all applications, as stipulated in the NZBC. Please consult a fire engineer when specifying GreenStuf insulation or contact your Autex account manager for further information.



Declare.



Durability: GreenStuf has a 50 Year Durability Warranty.

Moisture: GreenStuf is not affected by moisture. Exposure to an atmosphere of 50°C at 90% relative humidity for four days showed moisture absorption by weight of less than 0.03%.

Fire ratings:

ISO 9705: 1993

Classification: Group 1-S

Smoke Production Rate: <5.0m²/s

As required by NZBC CVM2

FAR 4045-2 issued 8th October, 2013

AS1530.3

Ignitability Index (0-20) 0

Heat Evolved Index (0-10) 0

Spread of Flame Index (0-10) 0

Smoke Developed Index (0-10) 3

APL Report 98055 (Test conducted on GreenStuf Thermal Insulation)

IEC 60695-11-5 (Downlight Fire Test Standard)

GreenStuf has been tested and assessed as complying with IEC 60695-11-5 Needle-flame Test.

PRODUCT (R-value)	NOMINAL THICKNESS (mm)	PACK SIZE	PRODUCT WEIGHT (gsm)	DENSITY (kg/m ³)	m ² /PACK
R1.0 BIB	45mm	1,200mm x 16.67Lm x 1 Roll	700gsm	15.6kg/m ³	20.0m ²
R1.5 BIB	100mm	1,200mm x 10.83Lm x 1 Roll	750gsm	7.5kg/m ³	13.0m ²
R1.8 BIB	100mm	1,200mm x 10.83Lm x 1 Roll	1,025gsm	10.3kg/m ³	13.0m ²
R2.2 BIB	150mm	1,200mm x 10.42Lm x 1 Roll	1,100gsm	7.3kg/m ³	12.5m ²
R2.6 BIB	140mm	1,200mm x 7.50Lm x 1 Roll	1,650gsm	11.8kg/m ³	9.0m ²
R3.2 BIB	190mm	1,200mm x 7.50Lm x 1 Roll	1,700gsm	8.9kg/m ³	9.0m ²
R3.4 BIB	200mm	1,200mm x 6.67Lm x 1 Roll	1,850gsm	9.3kg/m ³	8.0m ²
R3.6 BIB	210mm	1,200mm x 7.08Lm x 1 Roll	2,050gsm	9.8kg/m ³	8.5m ²
R4.1 BIB	210mm	1,200mm x 5Lm x 1 Roll	2,750gsm	13.1kg/m ³	6.0m ²

Foil Facings: GreenStuf BIB is supplied as standard without a foil face as the product in standard installations is fully self-supporting and does not require the additional stability of a foil. Where a vapour barrier or foil is required please discuss your requirements with your Autex account manager.

Hazardous Building Materials: GreenStuf is non-hazardous.

VOC Emission Safe:

VOC concentration: 0.01 mg/m³ (7 days).
 GECA/GreenGuard Limit: 0.25 mg/m³ (7 days).

Cetec Pty Ltd (Report: RCV080408)

Non-Corrosive: GreenStuf polyester is considered non-corrosive based on AS/NZS 4859.1 Standard for insulation.

Non-Toxic, Non-Allergenic, Non-Irritant: There are no known hazards with the use or handling of GreenStuf polyester.

Vermin: GreenStuf is naturally resistant to insect and vermin attack.

MSDS: Material Safety Data Sheets (MSDS) are available on request from your Autex account manager or can be downloaded from our website www.greenstuf.co.nz

Specification & Substitution: Autex specification documents are available through Masterspec or can be downloaded from our website www.greenstuf.co.nz

Substitution of any products in NZBC compliant systems should not be accepted and we recommend this be made clear in all specification and tender documents.

Installation: Autex recommends that all thermal and acoustic insulation be installed in accordance with the manufacturer's instructions (included on each GreenStuf

pack) and design detail. Insulation can be laid either between or under the purlins, or between the ceiling joists, but an air-gap of 25mm (minimum) must be provided under the underlay. This is a NZBC requirement under E2 External Moisture. Insulation installed touching the underlay will cause condensation and over time may cause corrosion of the underside of the cladding.

If insulation is placed above the rafter and takes up the full purlin depth, air movement is inhibited.

To provide sufficient ventilation, it is necessary to use a counter-batten to provide an air-gap between the insulation and underlay. The use of counter-battens requires a sufficient number of fixings to transmit the up-lift wind loads through the roof structure, and allow extra penetration depth of the cladding fixings to meet the appropriate withdrawal resistance values.

ISO Standards: Autex is committed to Quality and Environmental best practice through our ISO 9001 & ISO 14001 certified Quality and Environmental Management Systems.

Take Back Programme: GreenStuf is recyclable. Autex will gladly recycle used, uncontaminated GreenStuf insulation to help keep it out of landfills. For more information on recycling GreenStuf contact Autex on freephone 0800 428 839.

Packaging Recycling: GreenStuf packaging is recyclable LDPE 4. Please refer to your local recycling centres for drop off and collection services.


Environmental: All GreenStuf products are manufactured using 100% polyester fibre and contain a minimum of 50% previously recycled fibre (from PET plastic).

GreenStuf products are manufactured under Autex's Zero Waste Programme where all manufacturing waste is recycled back into the production process.


GreenStuf products are Global GreenTag GreenRate Level A certified and can be used to contribute to Green Star and Homestar accreditation.

GreenStuf is also Declare certified to be Red List chemical free and can be used in Living Building Challenge projects. For more information, please contact your Autex account manager, or visit our website www.greenstuf.co.nz


Domestic

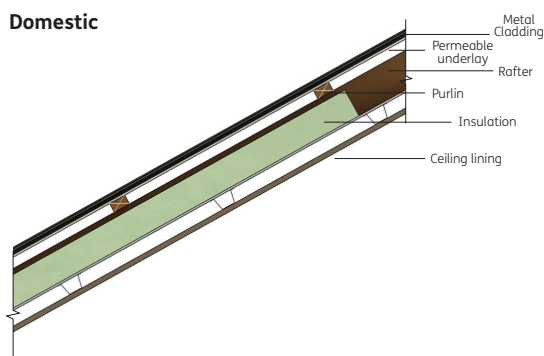

Domestic & Commercial

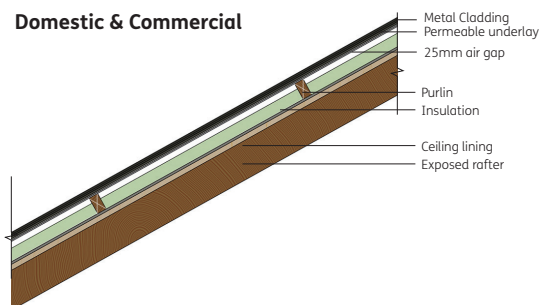

Domestic & Commercial

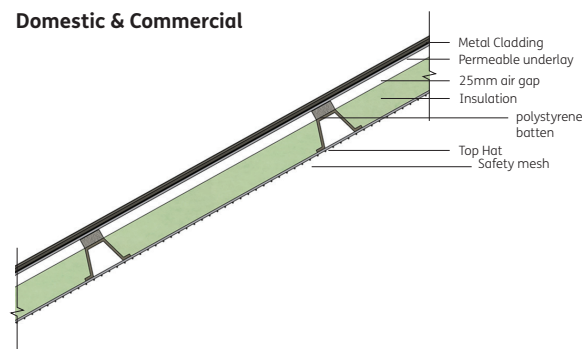

AUTEX



Insulation

Autex Industries Ltd
 702 - 718 Rosebank Rd
 Private Bag 19988,
 Avondale 1746, Auckland
 New Zealand
 Phone +64 9 828 9179
 Fax +64 9 828 5810
 Freephone 0800 428 839
www.autex.co.nz

GreenStuf is manufactured in New Zealand by Autex Insulation, a division of Autex Industries Limited. Autex retains the right to change products and specifications without prior notice. If a specification is critical to end use situation please discuss your requirements with your Autex account manager.

GreenStuf® is a registered trademark of Autex Industries.